



## **GS610/611 GLASSBREAK SHOCK SENSOR**

### **On the Glass or Frame Sensor**

**Model numbers: GS610 & GS611**

- **Double protection at affordable prices**
- **Excellent for windows/doors, roofs and walls**
- **Long life with superior false alarm immunity**
- **24K gold plated, hermetically sealed for high reliability**
- **Mounts on glass or frame horizontally or vertically**

**The GS600 series** are highly reliable inertia shock sensors designed to work with the GS614/GS617 analyzer module. The shock sensors have an optional reed switch for double protection on opening windows and doors. The highly sensitive devices can also be installed on walls or roofs offering special perimeter protection when necessary.

The sensor can be mounted vertically or horizontally and is a very versatile solution for many glass and non-glass applications. The sensitivity of the sensor is adjustable at the analyzer. Each unit comes with a built-in tamper and screw terminals for easy installation.

A hermetic seal and 24K gold plating provide high reliability and long life. The GS600 series is a complete perimeter detection package that offers superior performance at an affordable price.

continued

# Sentrol GS610 & 611 Shock Sensors

## Specifications:

### Electrical


Maximum loop rating ..... 1A-12 VDC  
 Loop Configuration ..... closed loop  
 Resistance ..... < 0.3 Ohms

### Environmental

Operating Temperature ..... -40° F (-40° C) to +122°F (50°C)  
 Relativity Humidity ..... 90%


### Features

Housing material ..... Flame retardant ABS plastic  
 Sensitivity setting ..... Set at analyzer  
 Mounting location ..... Glass or frame  
 horizontally or vertically-can also be mounted on walls, roofs  
 Mounting method ..... screw or tape

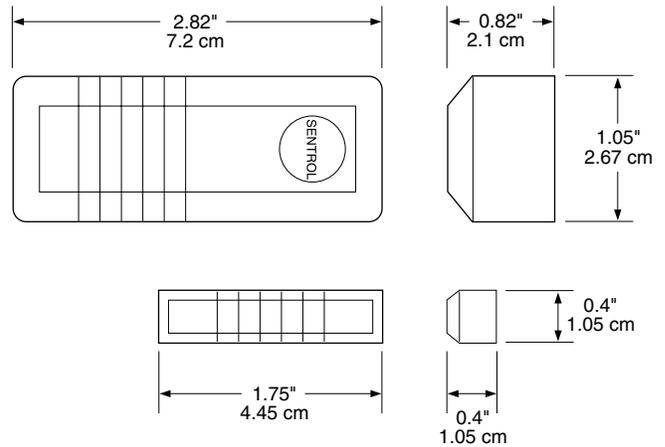

## Ordering Information

Description	Model Number	Color	Listing
Inertia shock sensor	GS610-W	White	
Inertia shock sensor	GS610-B	Brown	
Inertia shock sensor with reed switch	GS611-W	White	
Inertia shock sensor with reed switch	GS611-B	Brown	
Single multi-count analyzer	GS614-W		
Four zone multi-count analyzer	GS617-W		



**SENTROL**

### CORPORATE HEADQUARTERS

12345 SW Leveton Dr., Tualatin, OR 97062  
 Tel.: 503.692.4052 Fax: 503.691.7566  
<http://www.sentrol.com>  
**U.S. & Canada: 800.547.2556**  
**Technical Service: 800.648.7424**  
**FaxBack: 800.483.2495**

Sentrol reserves the right to change specifications without notice.

©2000 Sentrol

G-2955 FLG5K 0597  
 Printed on Recycled Paper